

Data sheet

Superwool® Plus MD Black Paper

ENGLISH

Metric information - Page 2

Description

Superwool® Plus MD Black Paper offers the same benefits of the current Superwool® fibre family with improved handle ability and enhanced thermal properties Superwool® Plus MD Black Paper is manufactured from pure raw materials using a new proprietary technology. In addition to enhanced thermal properties, large nuisance dust particles have been effectively eliminated making the product less irritating during use.

Superwool® Plus MD Black Paper is made of Superwool® Plus long fibres bonded with a low percentage of organic binder.

Superwool® MD Black paper has excellent thermal insulation characteristics and exceptional handling properties.

Superwool® MD Black Paper is very flexible and resistant to tearing, and particularly suited to all applications requiring further processing (laminated composites, die-cutting, rolling, folding).

The organic binder burns out cleanly on the first firing at approximately 300°C (572°F) with ignition starting at 180°C (356°F).

Type

Paper manufactured from high temperature insulation wool.

Classification temperature

1200°C (2192°F) EN 1094-1

The Thermal Ceramics business of Morgan Advanced Materials quotes all thermal conductivity data according to the ASTM C-201 method.


The maximum continuous use temperature depends on the application. Unaffected by most chemicals except strong alkalis, phosphoric acid and molybdenum. For further advise please contact your local Morgan Thermal Ceramics partner.

Typical applications

- Industrial and domestic appliance gasketing
- Glazing applications
- Passive Fire Protection applications
- Automotive heat shields

Benefits

- Good resistance to tearing
- High fibre index
- Flexible and resilient
- Low shot content
- Nominal thickness
- Smooth on both sides
- Resistant to thermal shock
- Very low thermal conductivity
- Easy to die-cut
- Not affected by the presence of molten aluminium
- Exonerated from any carcinogenic classification under nota Q of directive 97/69 EC
- Exonerated from any use restriction under annexe V number 7.1 of the German hazardous substances regulation

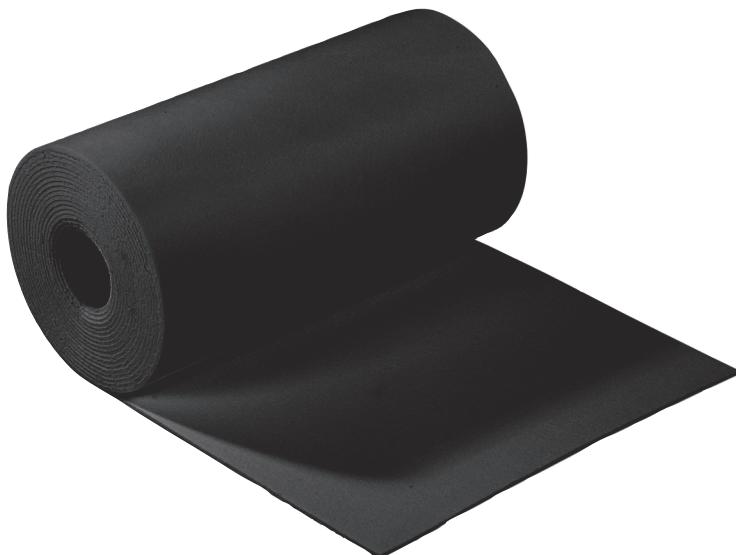

SDS:
EU: 421
NA: n/a
GHS: n/a

Data sheet

Metric information

Superwool® Plus MD Black Paper

	Superwool® Plus MD Black Paper
Classification temperature, °C	1200
Colour	black
Density, kg/m ³	230
Thickness (measured @kpa)	± 10%
Tensile strength, EN 1094-I, MPa	>0.65
Loss on ignition, %	12
Linear Shrinkage at 1000°C %	<2
Thermal conductivity, ASTM C-201, W/m K	
Mean Temperature	
	@200°C 0.05
	@400°C 0.07
	@600°C 0.11
	@800°C 0.16
	@1000°C 0.23

Availability and Packaging

Superwool® Plus MD Black Paper is available in standard rolls of 1000mm and 500mm which are packed in cartons.

Special roll lengths and widths can also be supplied.

Also available with self adhesive backing or aluminium foil backed.

Thickness (mm)	Length (m)
2	20
3	15
4	10
5	10
6	10
8	10
10	10

Contact

Europe:

Telephone:
+44 (0) 151 334 4030

E-mail:
marketing.tc@morganplc.com

North America:

Telephone:
+1 (706) 796 4200

E-mail:
northamerica.tc@morganplc.com

South America:

Telephone:
+54 (11) 4373 4439

E-mail:
marketing.tc@morganplc.com

Asia:

Telephone:
+65 6595 0000

E-mail:
asia.mc@morganplc.com

Whilst the values and application information in this datasheet are typical, they are given for guidance only. The values and the information given are subject to normal manufacturing variation and may be subject to change without notice. Morgan Advanced Materials – Thermal Ceramics makes no guarantees and gives no warranties about the suitability of a product and you should seek advice to confirm the product's suitability for use with Morgan Advanced Materials - Thermal Ceramics.

SUPERWOOL® is a patented technology for high temperature insulation wools which have been developed to have a low bio persistence (information upon request). **SUPERWOOL®** products may be covered by one or more of the following patents, or their foreign equivalents:

SUPERWOOL® PLUS and **SUPERWOOL® HT** products are covered by patent numbers: US5714421 and US7470641, US7651965, US7875566, EP1544177 and EP1725503 respectively.

A list of foreign patent numbers is available upon request to Morgan Advanced Materials plc.

Morgan Advanced Materials plc Registered in England & Wales at Quadrant, 55-57 High Street, Windsor, Berkshire SL4 1LP UK Company No. 286773