

Vacupor[®] RP-B2-S

Building authorities approved Vacuum-Insulation-Panel (VIP) with rubber protection

Characteristics

Vacupor[®] RP-B2-S is a microporous insulation material with an extremely low coefficient of thermal conductivity, i.e. with very good insulating properties. Vacupor[®] RP-B2-S consists of inorganic oxides. The other components are opacifiers for minimizing infrared radiation, and fiber filaments as reinforcing fillers.

For protection purposes, one or both sides of the panel are already covered with a sheet of rubber granule.

Under the certification number Z-23.11-1662 the German Institut for civil engineering (DIBT) granted the approval by the building authorities for Vacupor[®] RP-B2-S. The approval is valid for construction applications DAD, DAA, DZ, DI, DEO, WAB, WAA, WH, WTR and WI according to standard DIN 4108-10, table 1 and for prefabricated façade panels with insulated glass character.

Vacupor[®] RP-B2-S conforms to Baustoffklasse B2. The test of behaviour in case of fire according to DIN 4102-1, May 1998, Baustoffklasse B2; Testcertificate No. H.3-145/07 and H.3-146/07, was issued by the Forschungsinstitut für Wärmeschutz e.V. München.

The core material of Vacupor[®] RP-B2-S is not flammable and is classified A1 according to DIN ISO EN 13501-1.

Vacupor[®] RP-B2-S is heat sealed in a metallized, multilayer plastic barrier film under vacuum. The very low internal pressure and the microporous panel core is responsible for the extremely low thermal conductivity values.

Application

Vacupor[®] RP-B2-S was specially developed for applications in the building and construction industry where an approval by the building authorities is required.

The low density and IR opacifiers contained in these grades greatly reduce the thermal conductivity of Vacupor[®] RP-B2-S Systems.

Due to the single- or double-sided coverage with rubber granule protection sheets, Vacupor[®] RP-B2-S is excellent suitable for all kind of plane layings. The construction of the insulation gets considerably easier and the VIPs can be entered without danger of damaging.

Vacupor[®] RP-B2-S is successfully used as insulation



material in the following areas:

- Terrace insulation
- Cold storage floor insulation
- Floor insulation
- Flat roof insulation

Form of delivery

1. Standard sizes:

- 600 mm x 500 mm
- 1200 mm x 500 mm
- 1000 mm x 600 mm
- 1200 mm x 1000 mm

2. Standard thicknesses:

- 10, 15, 20, 25, 30, 35, 40, 45 and 50 mm
- Further thicknesses on request

3. Special formats available on request

Restrictions on Applications

The metallized, multilayer plastic film of the Vacupor[®] RP-B2-S must not be damaged by drilling, cutting, milling, nailing or the like, since the interior pressure of the panel will rise and the special properties of the panel, in particular its excellent insulation characteristics, will be lost.

Shelf life

Vacupor[®] RP-B2-S has a very long shelf life. Please also observe our pressure rise table: Thermal conductivity as a function of internal pressure.

Product data

Properties (applicable to standard format)	Comments	Standards	Units	Values
Color	Caused by film / coverage			Silver / Black
Density ¹⁾			kg / m ³	150-300
Thermal conductivity	@ 1 mbar ²⁾ @ ambient pressure	Measured at 22,5 °C (72.5 °F) mean temperature	DIN 52612 W / (m×K) W / (m×K)	≤ 0,005 ≤ 0,019
Rated value	According to DIBT approval number Z-23.11-1662		W / (m×K)	0,007
Heat resistance ³⁾	Caused by film weld seam		°C	-50 <T< 120
Maximum film projection			mm	100
Interior pressure ²⁾	As delivered		mbar	≤ 5
Theoretical pressure rise	Under standard conditions		mbar / a	0,5
Maximum panel dimensions	Length Breadth Thickness		mm mm mm	150 - 1500 150 - 1000 10 - 50
Length and width tolerances	0 to 500 mm 501 to 1000 mm > 1000		mm mm mm	+ 1,0 / - 2,0 + 1,0 / - 4,0 + 1,0 / - 6,0
Thickness tolerances	< 20 mm 20 mm to 30 mm > 30 mm		mm mm mm	± 1,0 + 1,0 / - 2,0 + 1,0 / - 3,0
Thermal shock resistance	The core material of Vacupor [®] RP-B2-S is insensitive to high and low temperature thermal shocks			


¹⁾ Dependent on board thickness

²⁾ Dependent on the panel-size and -thickness, internal pressure can be between 0.5 – 5 mbar. The standard internal pressure in the evacuation chamber is < 0.5 mbar.


³⁾ The limits are fixed by the barrier film (sealing material) used; constant load: ≤ 80°C (176°F); short load time with 120°C (248°F): roughly 30 minutes.

The above data are only intended as a guide and should not be used in preparing specifications.


Thermal conductivity (panel core) DIN 52612

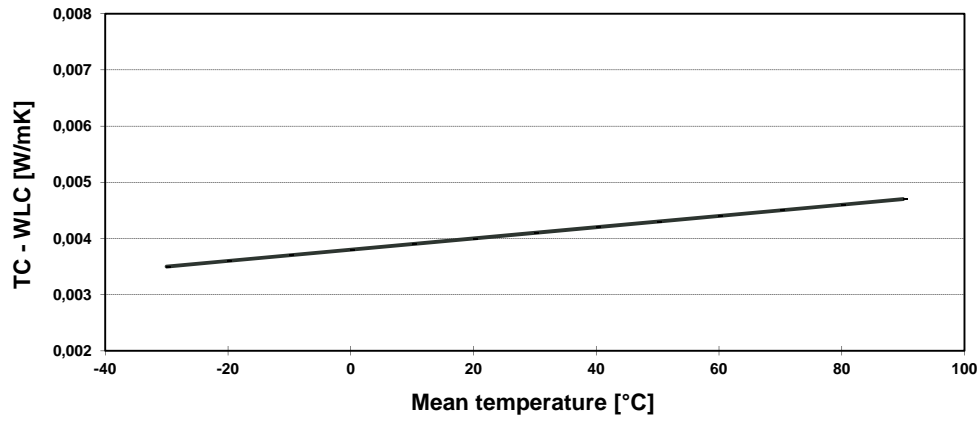


Compression behavior (panel core)

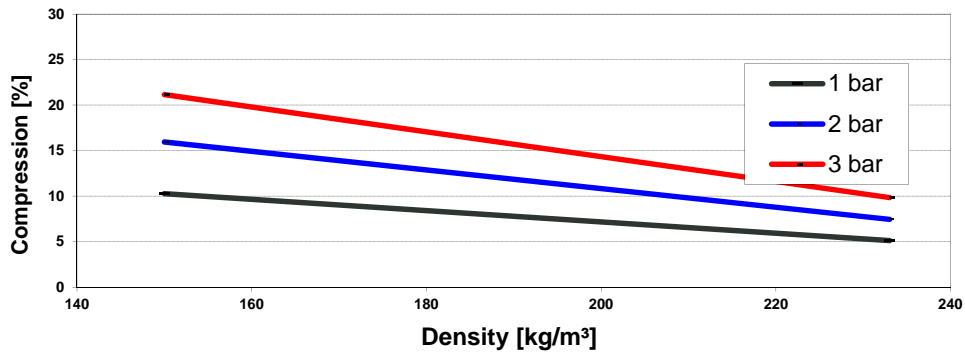

Low-temp. Compression strength (panel core)

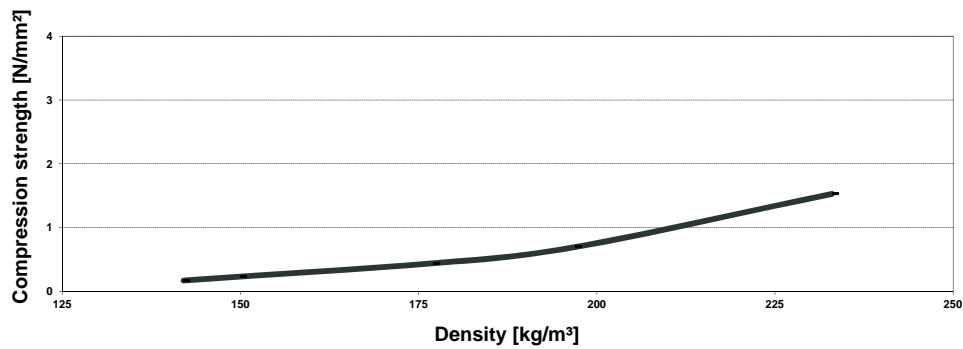

Thermal conductivity as a function of internal pressure (DIN 52612)

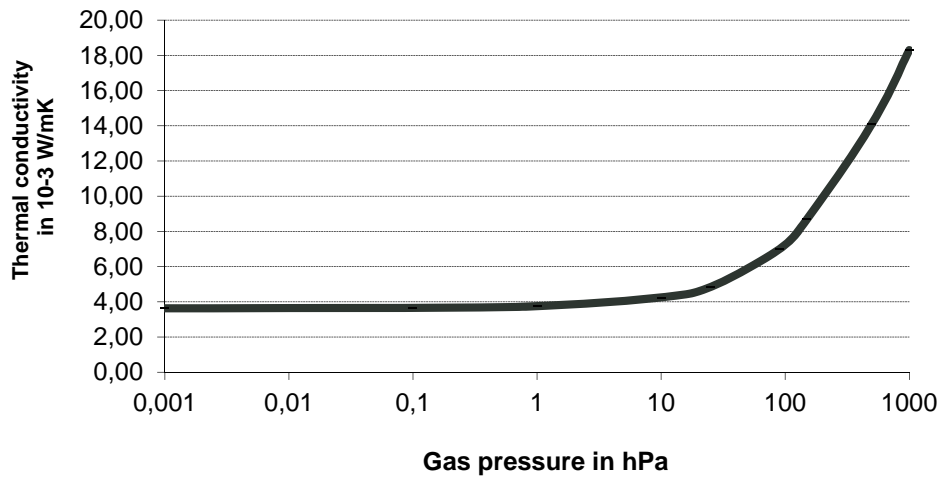

gas pressure p_{gas} [hPa]	U- Value [W/(m ² K)]	λ [10 ⁻³ W/(mK)]
< 10 ⁻³	0.187	3.63
0.1	0.188	3.66
1.0	0.193	3.75
10	0.219	4.25
150	0.448	8.70
1000	0.943	18.30

Safety directions

Vacupor[®] RP-B2-S is not a hazardous material as defined in EU directive 2006/1907/EEC. Please also observe our material safety data sheet. Vacupor[®] RP-B2-S does not liberate hazardous decomposition products and, as far as is known at present, does not cause any problems to human health or the environment.

The data presented in this leaflet are in accordance with the present state of our knowledge, but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product constants within the scope of technical progress or new developments. The recommendations made in this leaflet should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are also being used. The recommendations do not absolve the user from the obligation of investigating the possibility of infringement of third parties' rights and, if necessary, clarifying the position. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the product for a particular puRP-B2-Sose.

Please address all technical questions that affect quality and product safety to:

Porextherm Dämmstoffe GmbH
Heisingerstrasse 8/10
D-87437 Kempten

www.porextherm.com
info@porextherm.com



and Vacupor[®] are registered trademarks of Porextherm GmbH.

